




FITTING INSTRUCTION

Mitsubishi Triton 2019

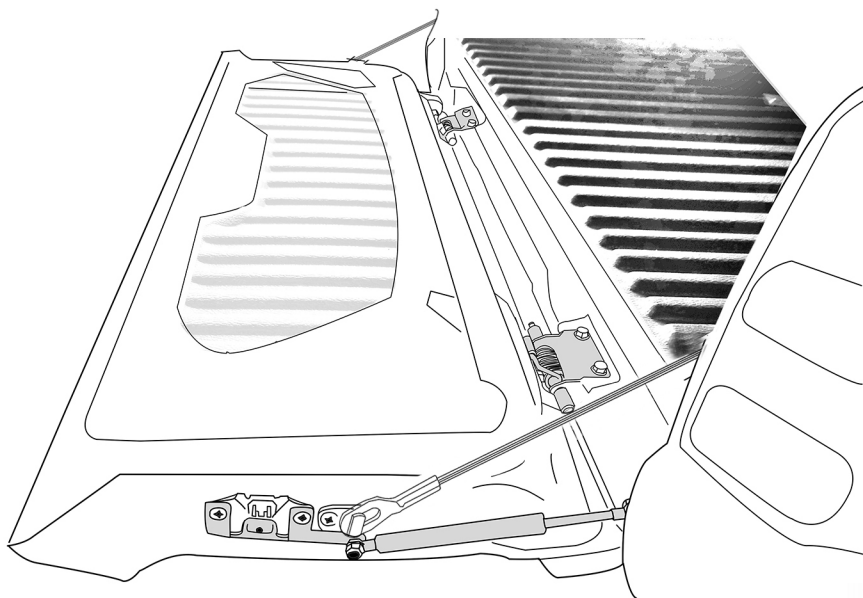

Patent Pending Worldwide

Part list




Tooling



No.14




No.10




No.14 , No.10

5. Un bolt A&B to take out rear light.


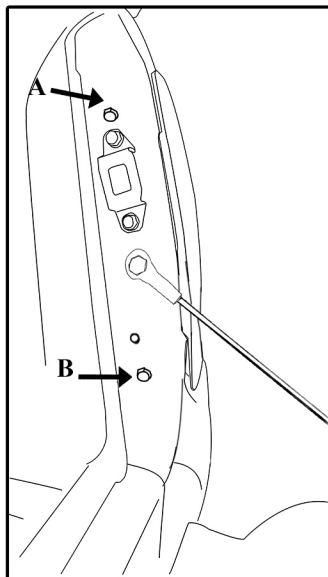


Caution!
Take out rear light
in the correct direction
(Backward)

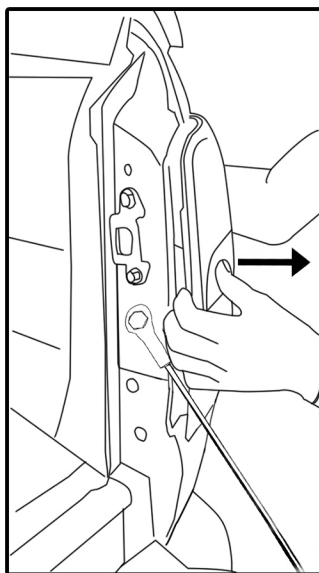


6. Attach damper bracket

6.1 Use Original bolt and washer

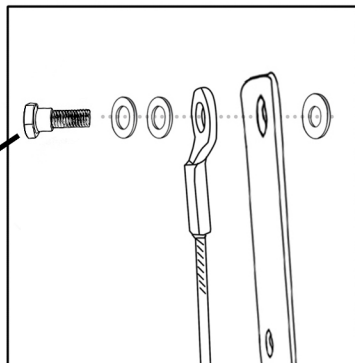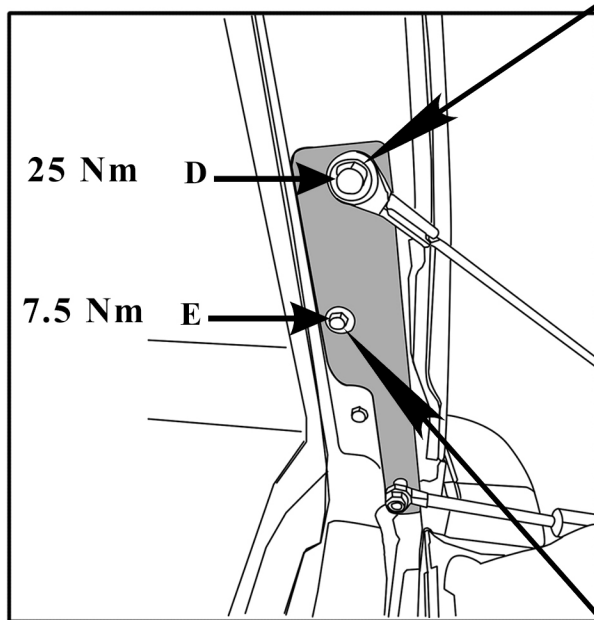


6.2 Use bolt , washers , and nut M6

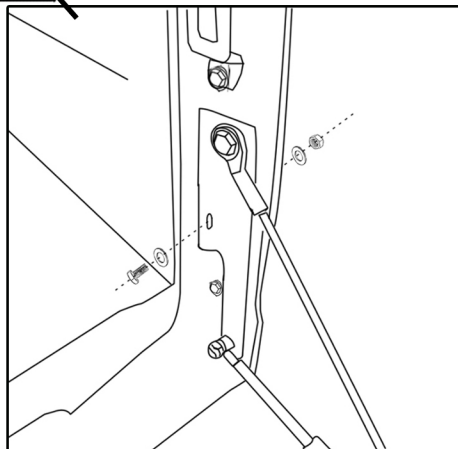


7. Put back the rear light.


1. Take off original tailgate bracket

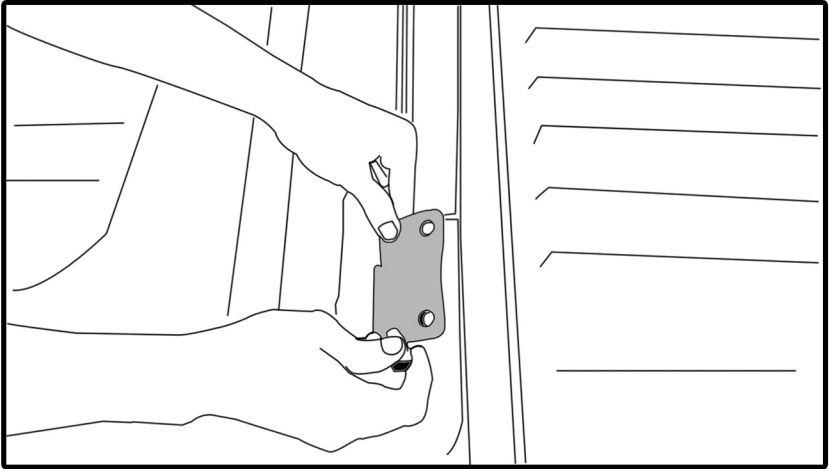


2. Put ProLift brackets with the tailgate using original bolts

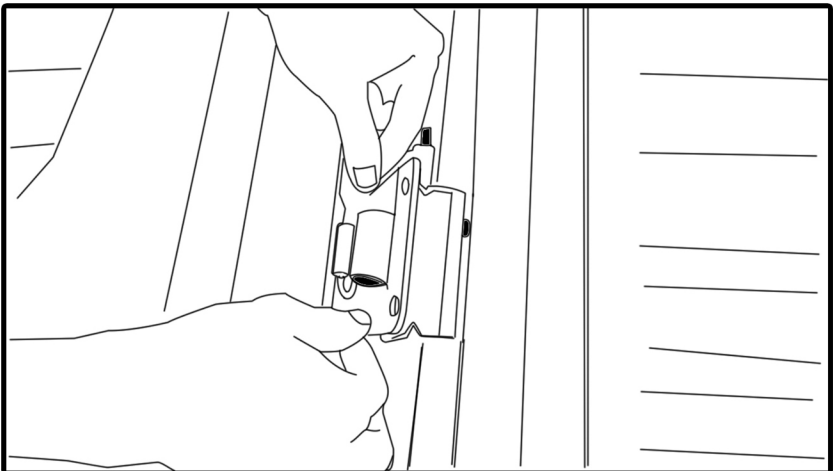


- 3. Lift the tailgate to proper position
and fit the ProLift bracket with
the truck using original bolts**

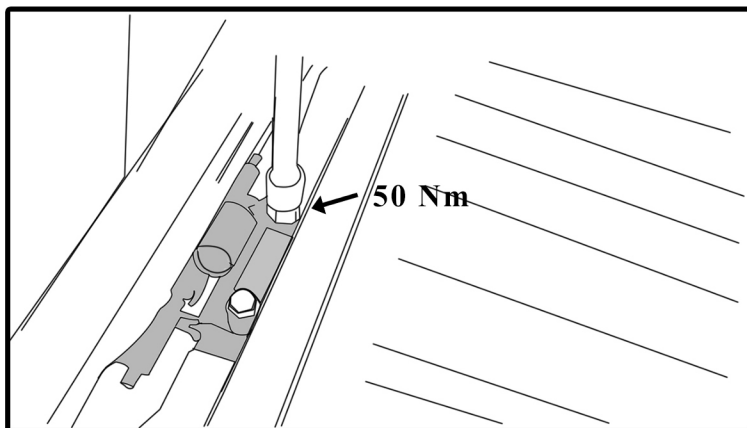


- 4. Open the tailgate and take out the
stopper rubber**

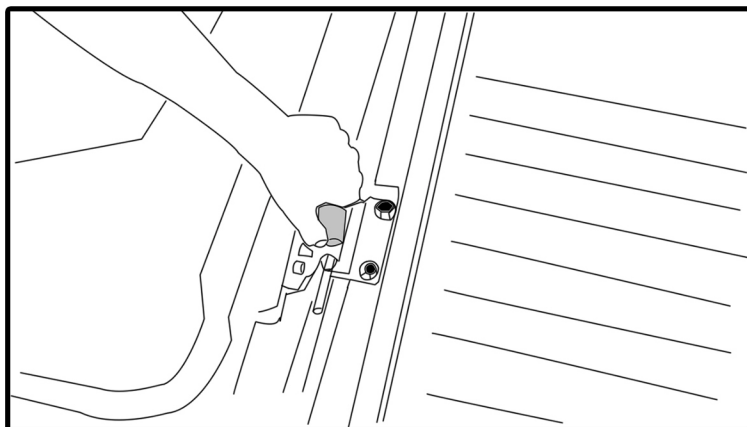

**8. Attach damper bracket to the tailgate
using original bolts.**

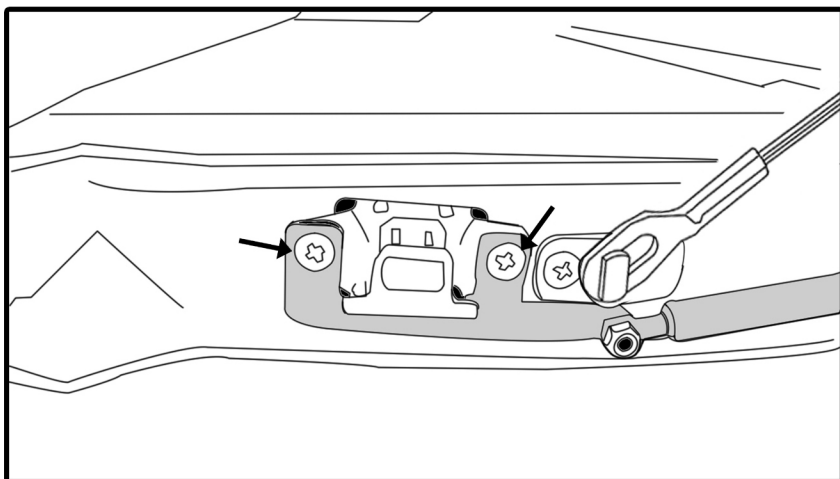

CAUTION

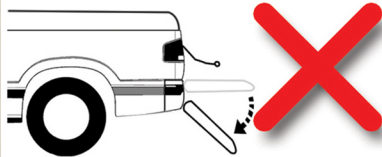

Do not take off
tailgate cable
and drop down
the tailgate

Note :

Apply WD40 or grease to the moving parts regularly for good performance of the product.

Patent Pending Worldwide