




FITTING INSTRUCTION


MG

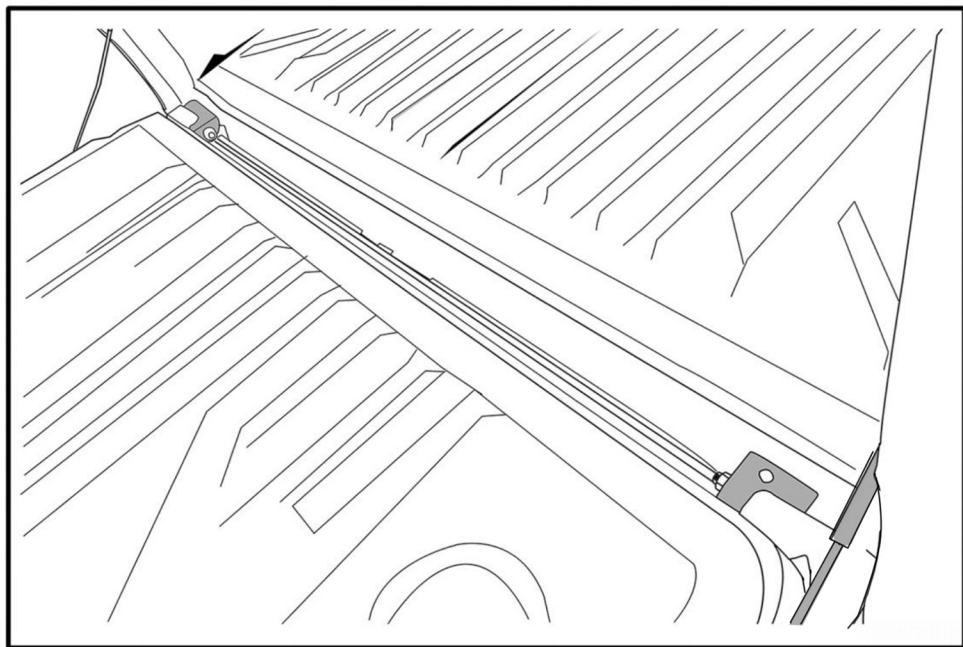


Patent Pending Worldwide

**NOTE : Process #2 - #4 will
be done from the bottom of
the tailgate while the tailgate
in closed position.**


1.take off rear bumper

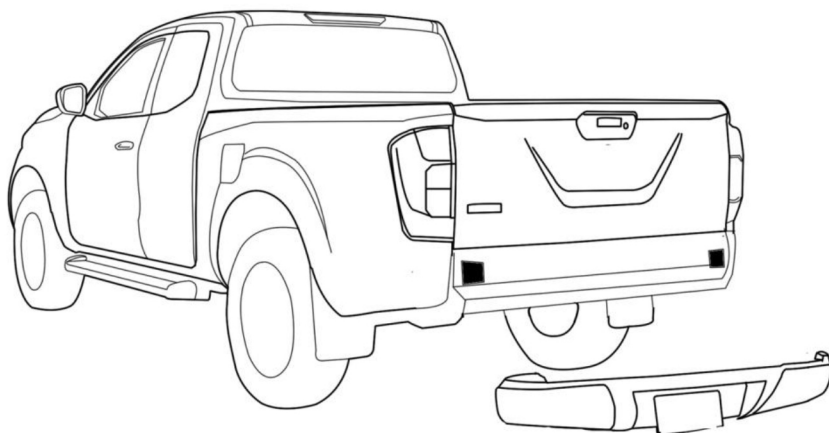

2.un-bolt the truck tailgate bracket

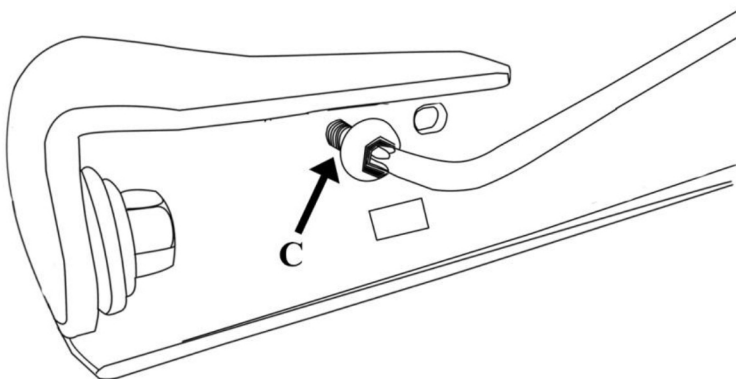


**3. Attache tailgate bracket (A) on the truck
tailgate bracket (B) change bold JMF M8x30 (C)**

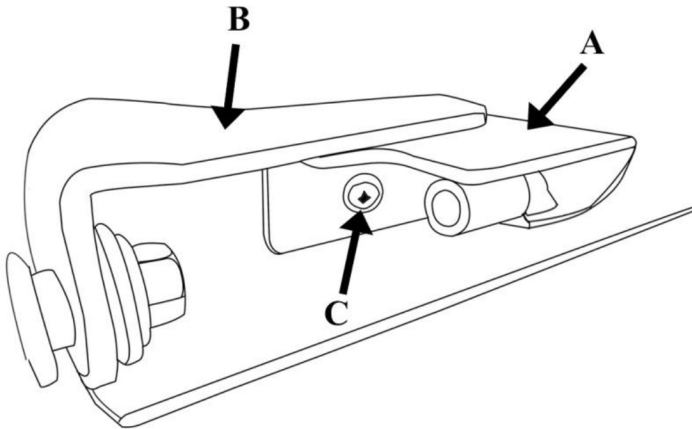


4. Assembly the spring set with tailgate bracket


4.1 put spring set with tailgate bracket as below picture

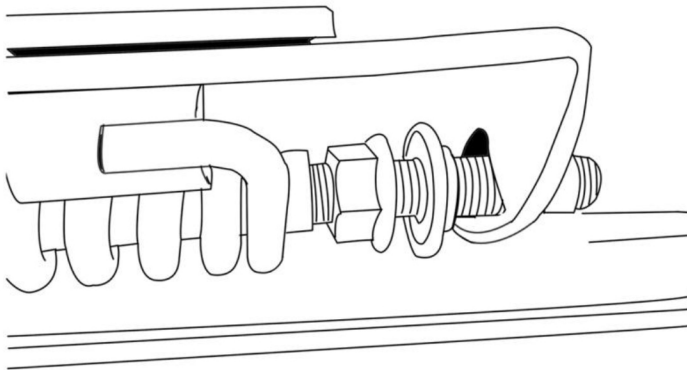


**4.3 tighten nut (E) while holding the rod of the spring set
with #6 wrench (F)**

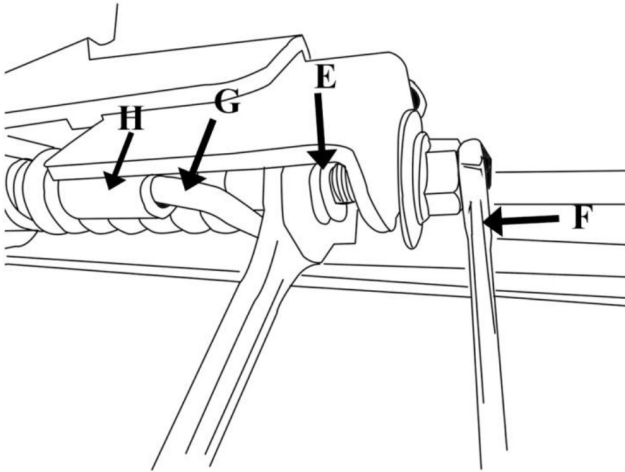


**Make sure that the spring end (G) is slided in the bush (H) of the
tailgate bracket**

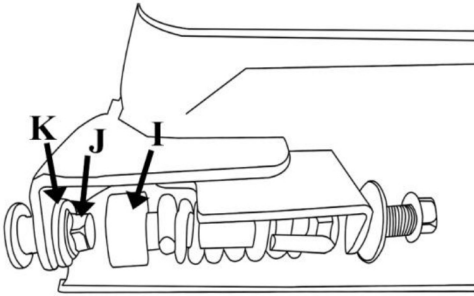


**tighten the nut (E) till bush (I)
completely cover the bolt head (J)
and touch the flat washer (K)**

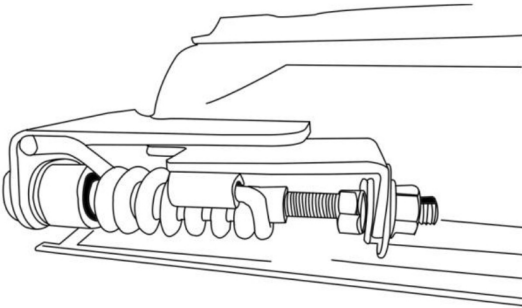


**4.4 tighten nut (L) with wrench #12 (M) while
holding nut (E) with wrench #12 (N)**

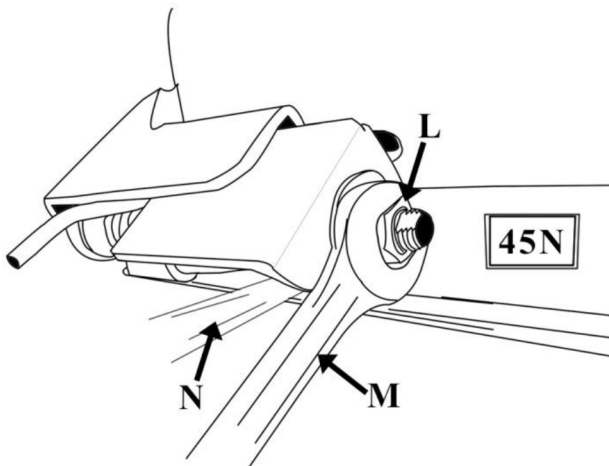


5. Attache spring pushing bracket (O) with the truck using original bolt (P). If the truck has stopping rubber, can put it back through hole (Q)

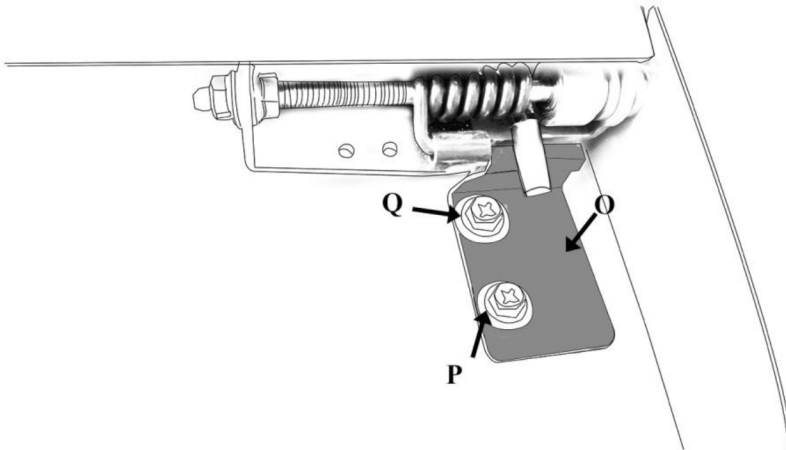



6. Attache damper to the truck using original bolt (R) (S)

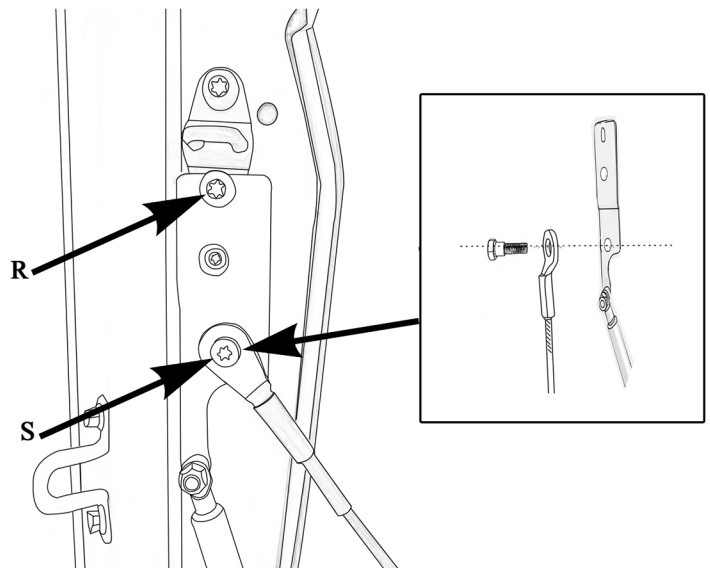


- 7. Attach damper to the tailgate by putting damper bracket (T) under tailgate sling bracket (U) and tighten together with original bolt (V) (W)**

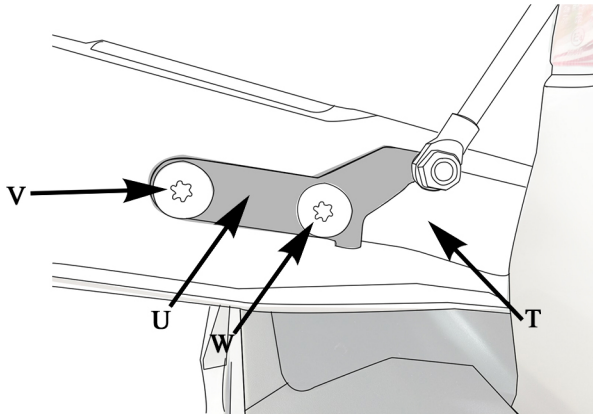


- 8. Put stopper rubber with tailgate bracket**

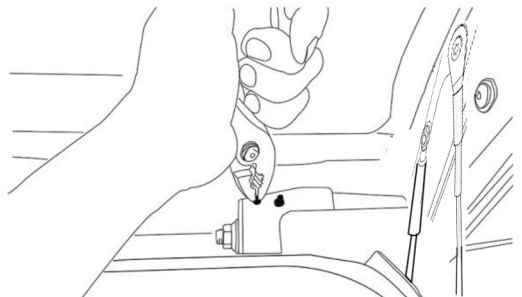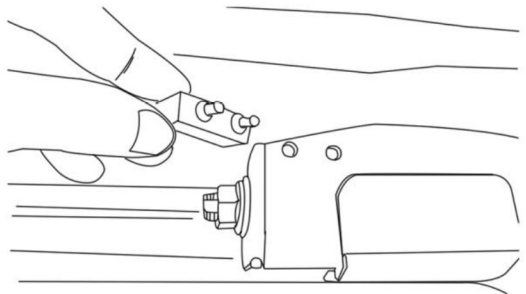

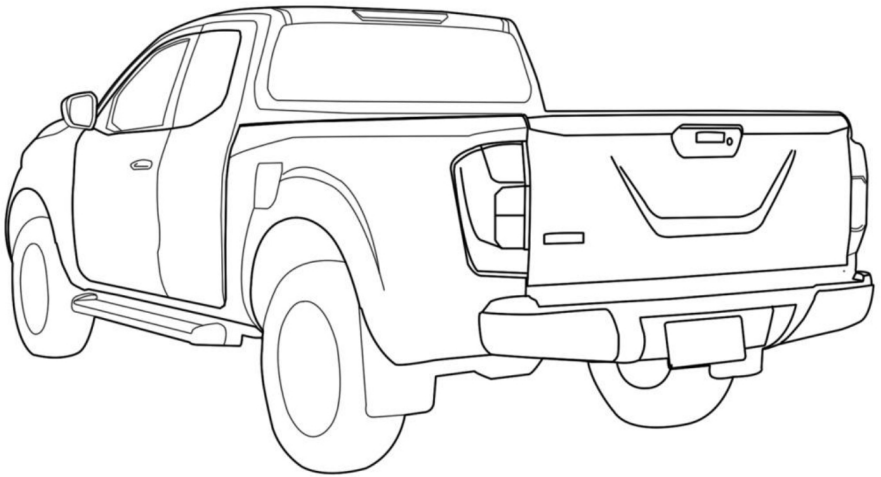

9.put back rear bumper

CAUTION

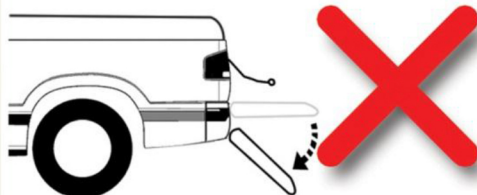

Do not take off
tailgate cable
and drop down
the tailgate

Note :

Apply WD40 or grease to the moving parts regularly for good performance of the product.

Patent Pending Worldwide