







E-Tailgate lock for MITSUBISHI TRITON 2024


Installation Instruction

CAUTION:


- 1. The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.
- 2. Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.

PART LIST

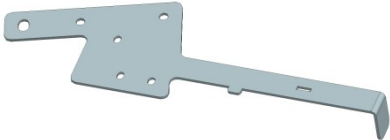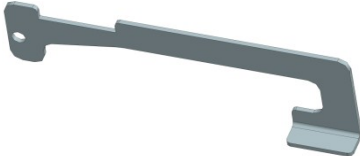
NO.	QTY	NAME	NO.	QTY	NAME
①	1	 Bracket 1	②	1	 Bracket 2
③	1	 Actuator	④	1	 Wire harness 1(Universal)
⑤		 Wire harness 2	⑥	1	 Hexagon Socket Button Head Screws M6_20
⑦	1	 Hex flange nut M6	⑧	3	 Phillip tapping screw ST4.8_16

⑨	2	 Hexagon Socket Button Head bolt& Spring washer& Large flat washer combo M6_20/A2-70	⑩	1	 Allen Wrench S=4
---	---	--	---	---	---


Installation Fig.

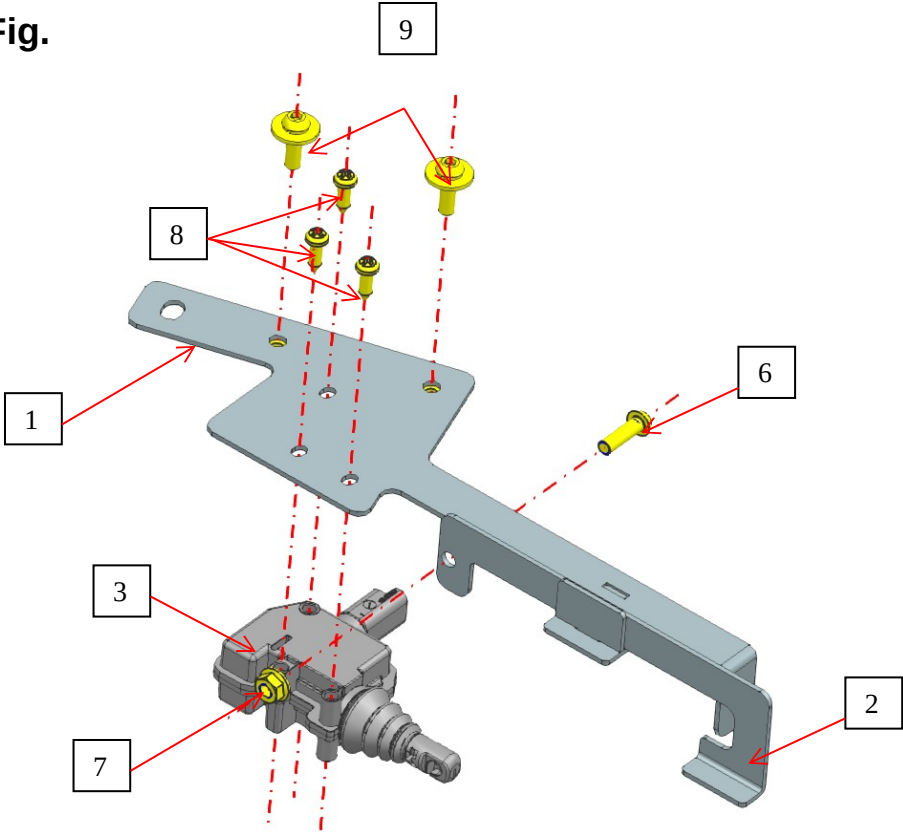

Step 1: Remove the steel cover plate on tailgate by loosening the screws

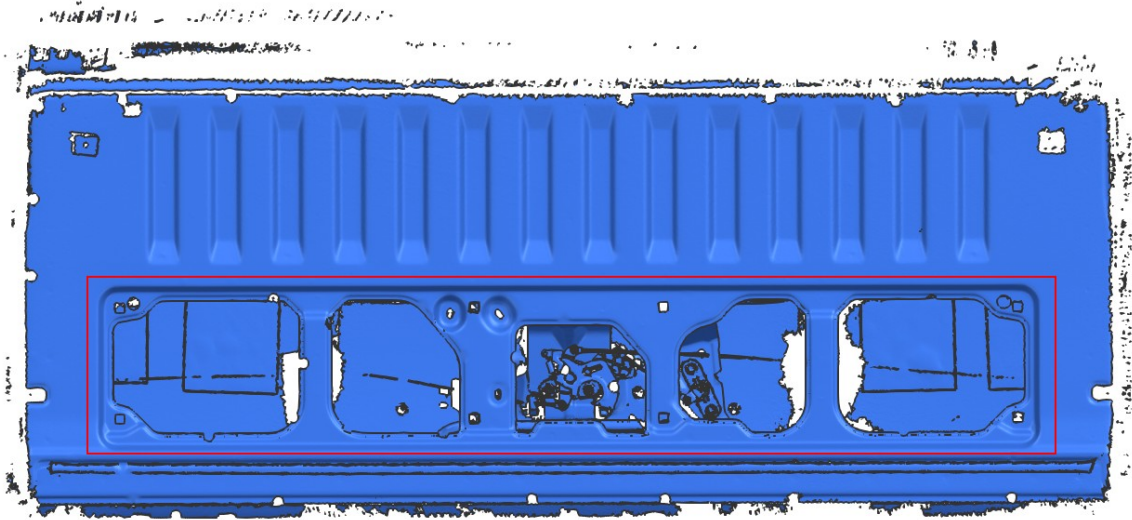

Step 2: As below picture shows, install bracket 1 , bracket 2 & ③ actuator with ⑥⑦⑧.

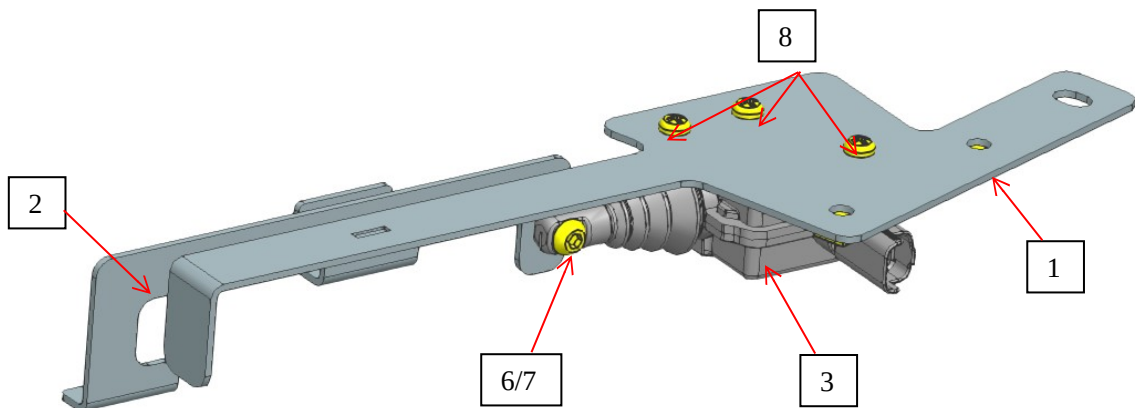

Step 3: Put the bracket assembly into the tailgate, fasten it with ⑨ M6 bolt combo.




Step 4: Route the wiring harness


4.1 Route the ⑤ wiring harness from tailgate to passenger side B pillar.

a. Remove the harness and rubber grommet from the indicated location of the passenger side B pillar.


- b. Unplug the male and female connectors from the harness.
- c. Connect the ⑥ wiring harness 2 to both the male and female connectors of the harness.
- d. Keep the harness outside for the time being.

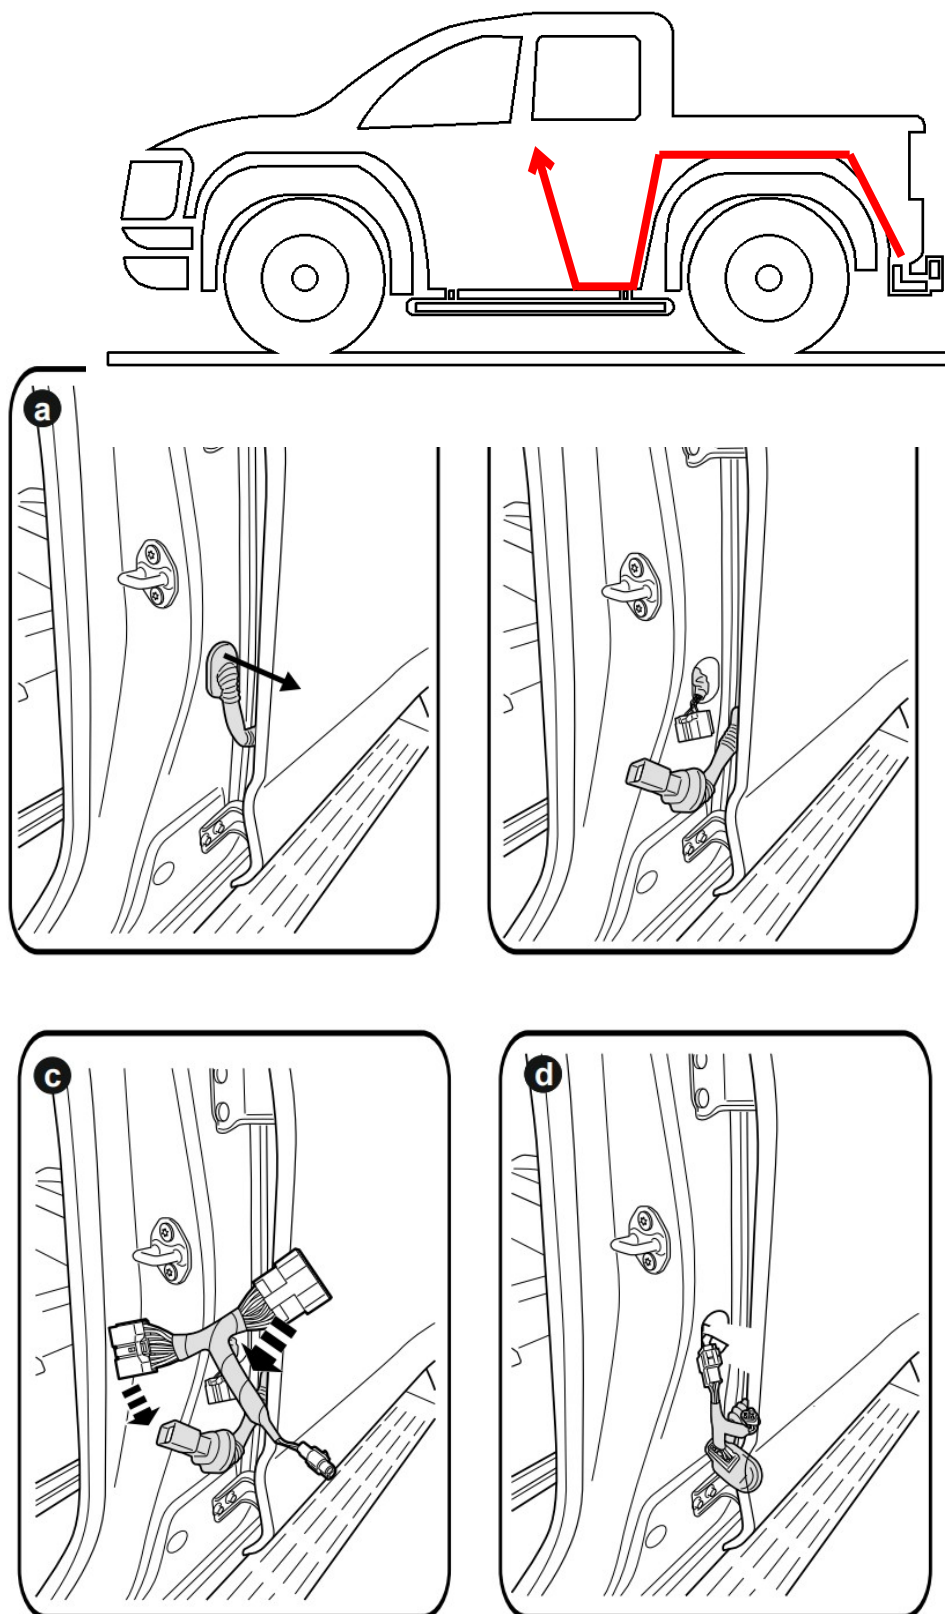

4.2 Remove the decoration panel on front& rear passenger side. Then remove the passenger side B pillar lower and upper trims as below picture shows.

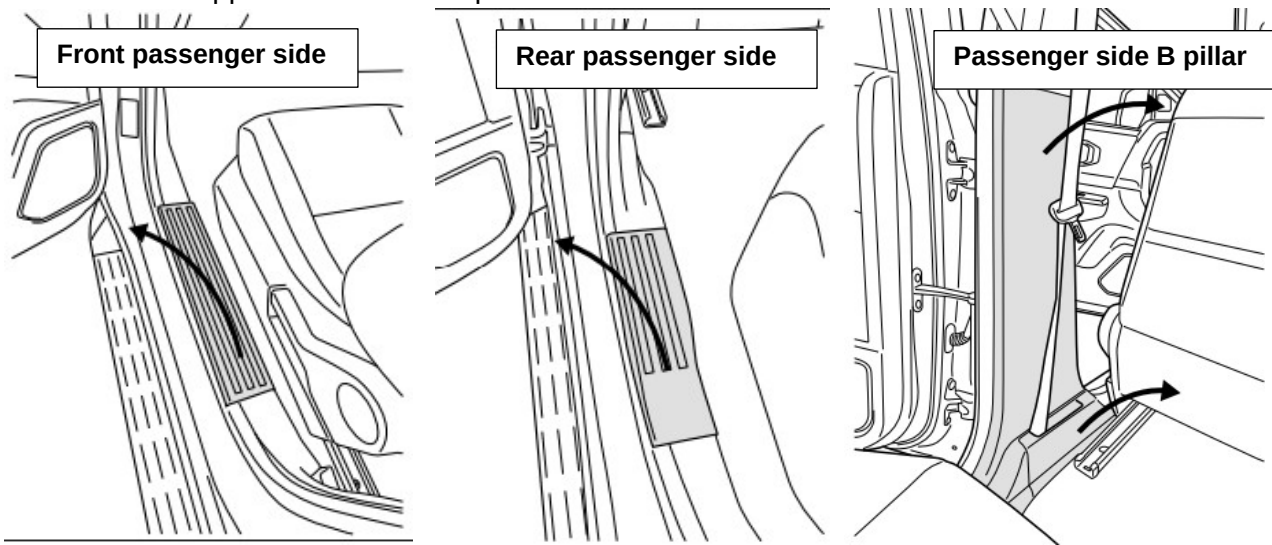



4.3 As below picture shows, find out and remove the indicate grommet.

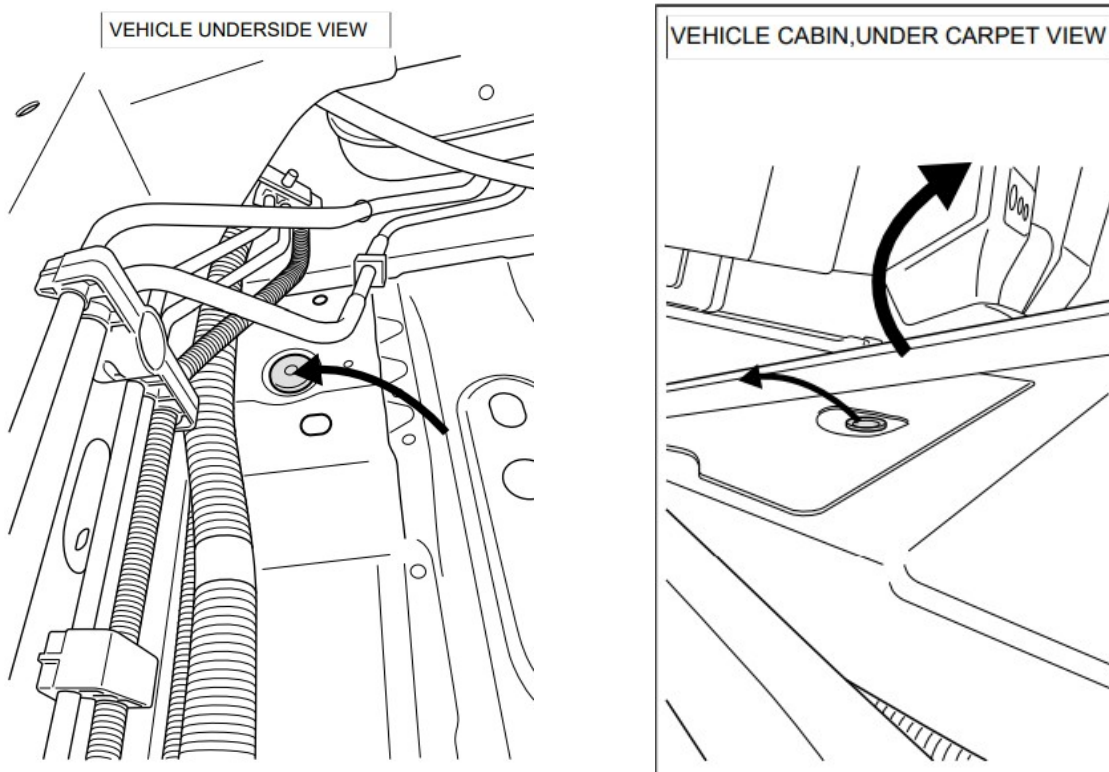



4.4 Thread the ⑤ universal wiring harness through the underside hole and into the cabin

Item NO: PW05774101


Name: E-Tailgate lock for Mitsubishi Triton 2024

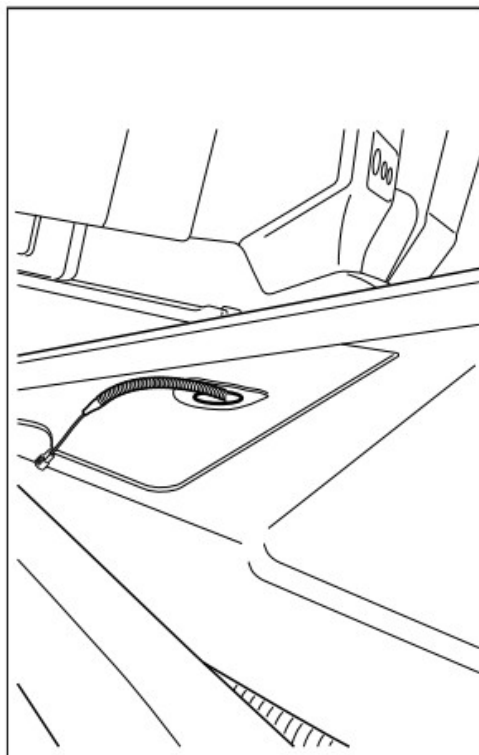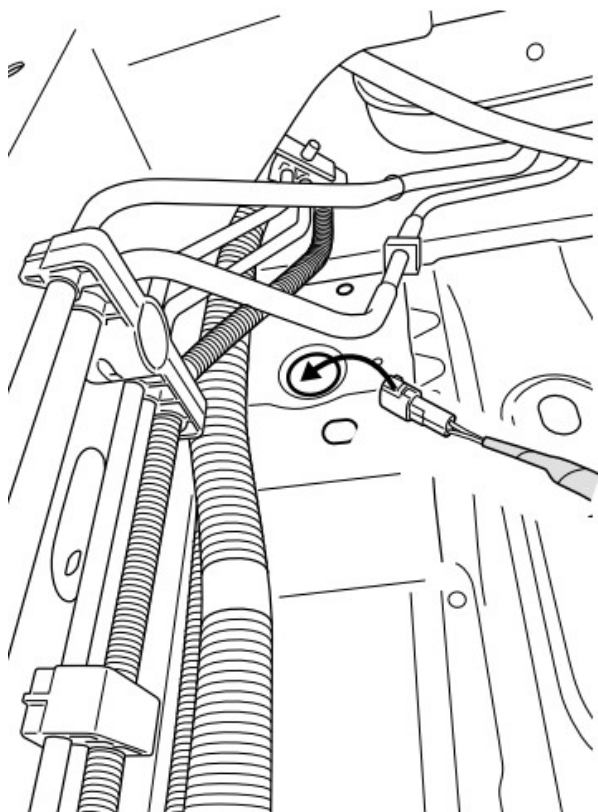


4.5 Cut a small hole on grommet, so that the universal wiring could be ran through it.

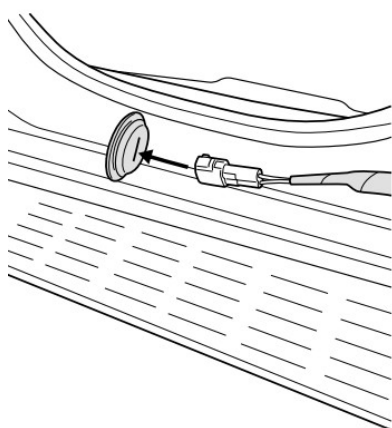

4.6 Un-clip the white indicated harness clip from the B pillar. Thread the universal wiring through it.⑤

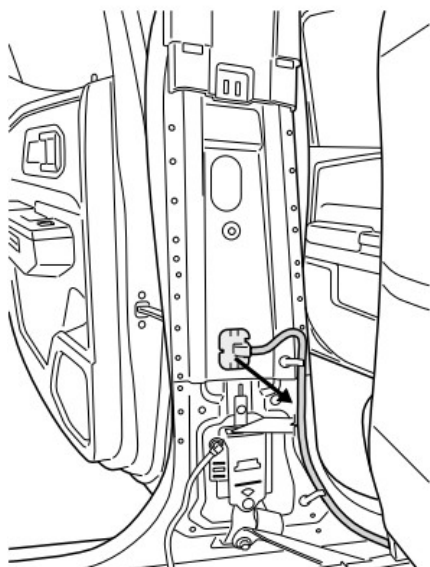


4.7 Thread the universal wiring through to the outside exposed cavity of the B pillar. Now connect wiring 1& wiring 2

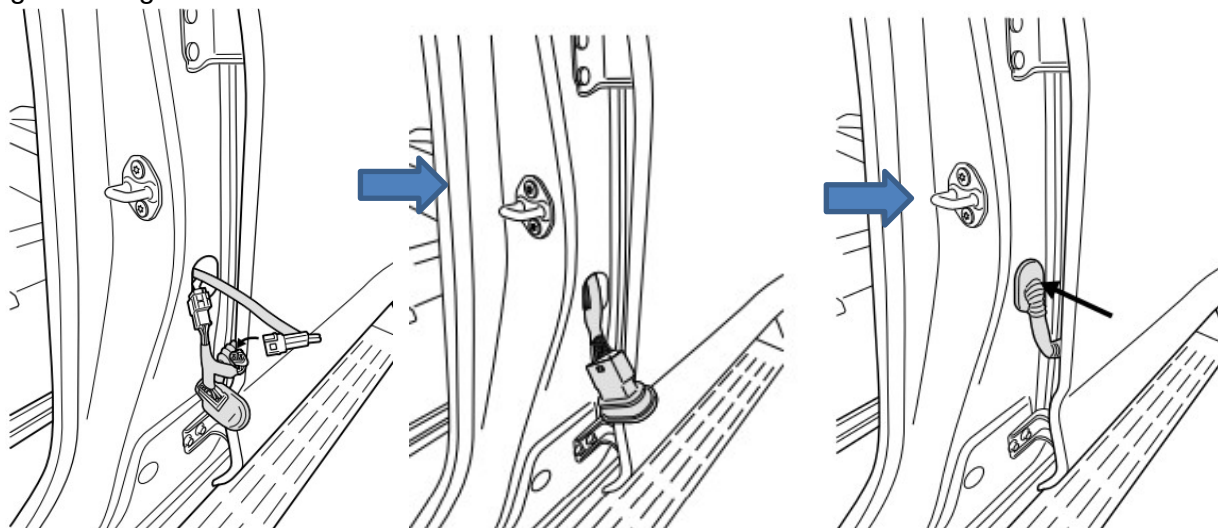

4.8 Push the harness plug back in to place and fit the grommet back into its location.

Item NO: PW05774101

Name: E-Tailgate lock for Mitsubishi Triton 2024

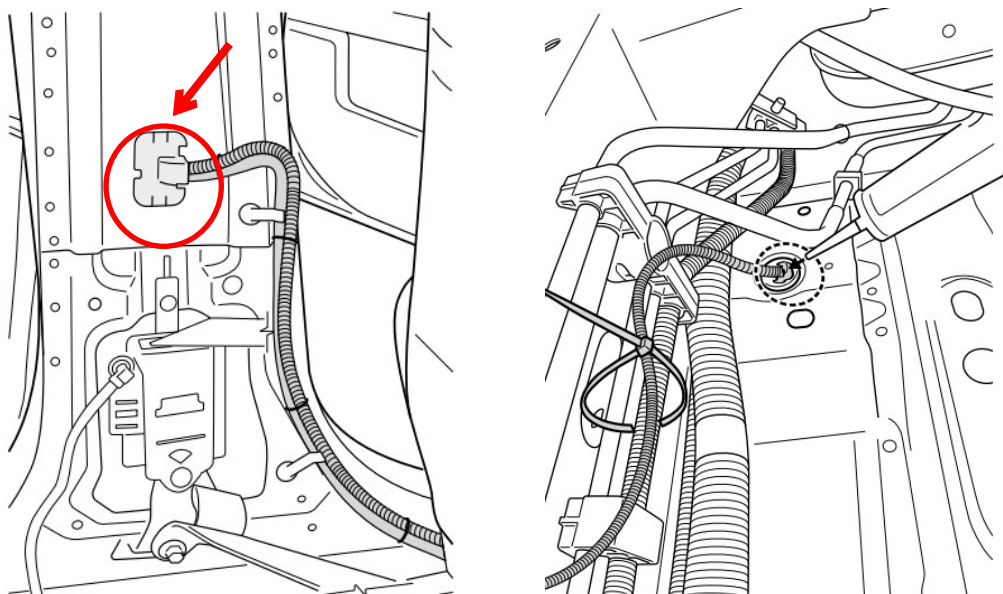

Final step:

Finish all the installation, test the tailgate lock function with the remote control, after testing reinstall the fender flare and tailgate cover.